


Series 2100

S2 134PL2

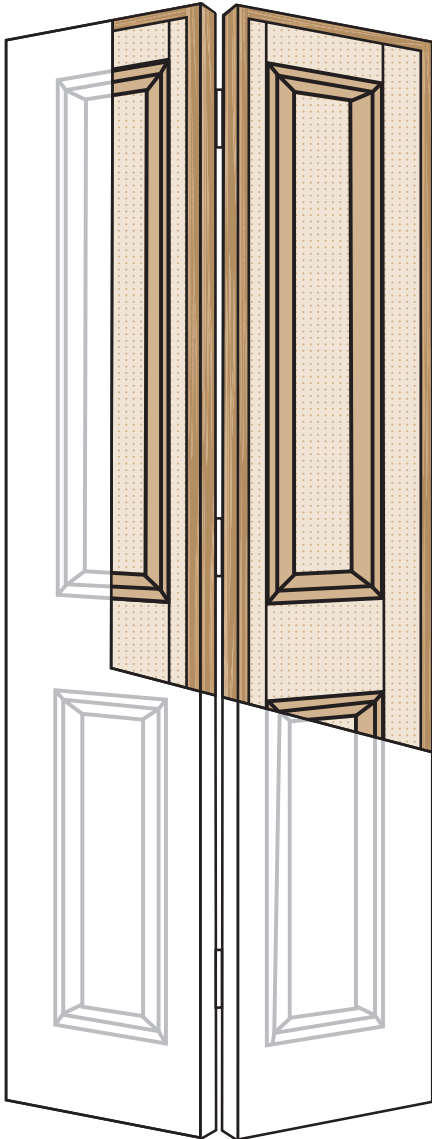


**SPECIFICATIONS DESCRIPTION**


<b>Rails</b>	1 1/4 (32 mm) low-density wood
<b>Stiles</b>	1 1/4 (32 mm) low-density wood
<b>Core</b>	Blocks of particle board density 28-32 lbs (per cubic foot)
<b>Face</b>	As selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Hinge</b>	<b>Heavy-duty</b> installed
<b>Warranty</b>	1 year against warping

\*Dimensions are nominal before trimming


**Face**




Caiman



Carrara




Cashal




Classique




Clermont




Colonist



Corvado



Conmore



Coventry



1 3/4 ± 1/16

1 1/4



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.