

Series 2100


V2 134

SPECIFICATIONS DESCRIPTION


Rails	1 1/4 (32 mm) low-density wood
Stiles	1 1/4 (32 mm) low-density wood
Core	Hollow with honeycomb, 1 (25 mm) cells, 11 PSI
Lock Block	On both sides 2 7/8 (73 mm) x 8 (203 mm) for lock
Face	As selected
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
Warranty	1 year against warping

*Dimensions are nominal before trimming


Face




Caiman




Carrara




Cashal




Classique




Clermont




Colonist





Corvado



Conmore



Coventry

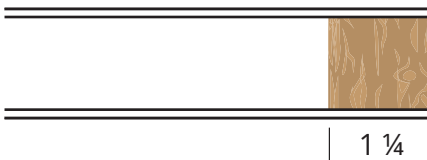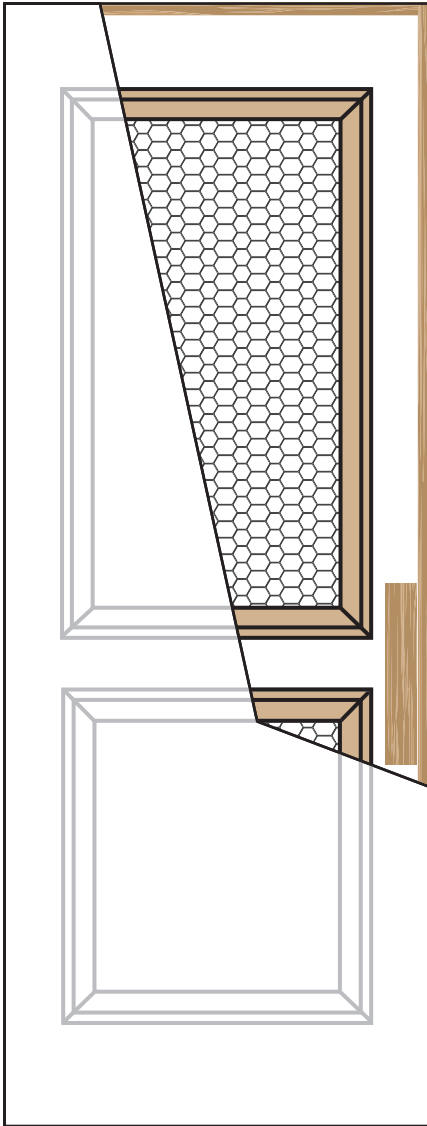

1 3/4 ± 1/16

1 1/4



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.