


Series 2100


V2 134PL2

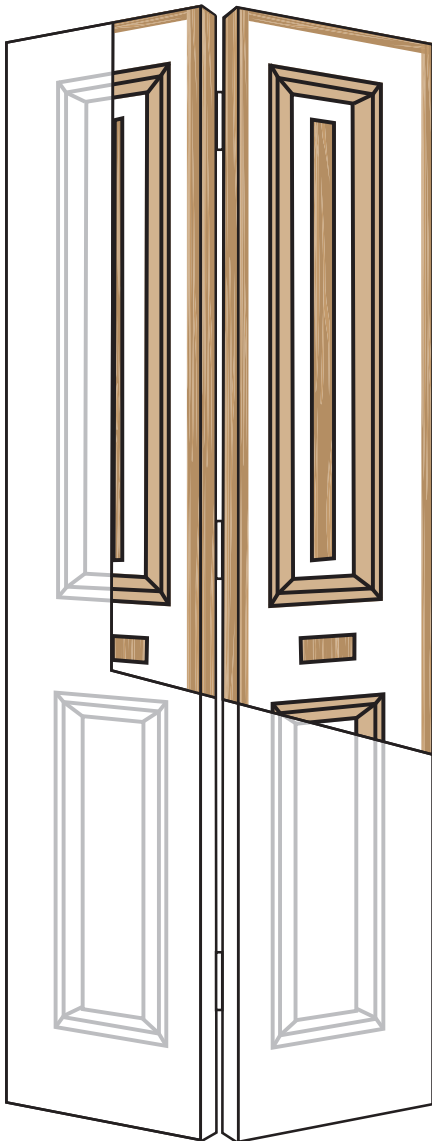


SPECIFICATIONS	DESCRIPTION
Rails	1 1/4 (32 mm) low-density wood
Stiles	1 1/4 (32 mm) low-density wood
Core	Hollow with 1 1/4 (32 mm) low-density wood reinforcement
Lock Block	In centre for escutcheon (knob) 1 1/4 (32 mm) x 5 1/2 (140 mm)
Face	As selected
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
Hinge	installed
Warranty	1 year against warping

*Dimensions are nominal before trimming


Face




Caiman



Carrara




Cashal




Classique




Clermont




Colonist



Corvado



Conmore



Coventry



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.