


Series 2800

P2 834HOL

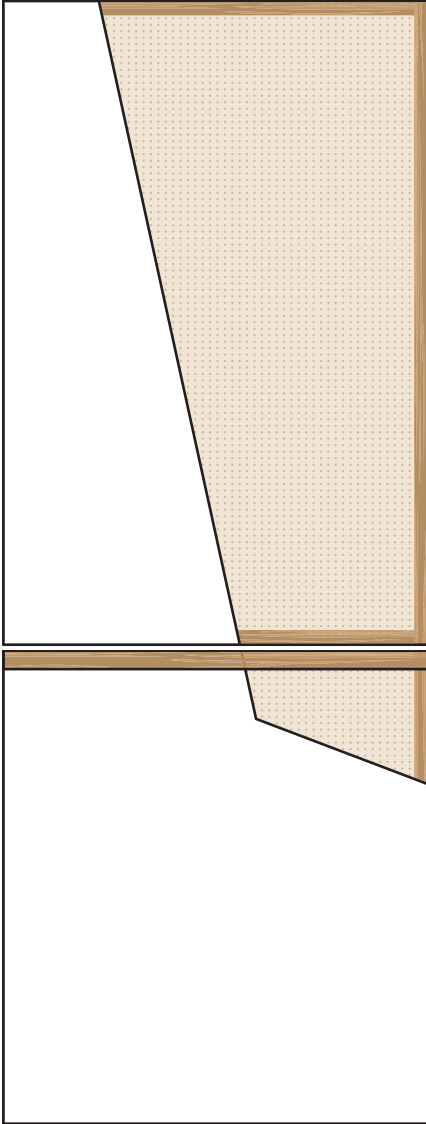

SPECIFICATIONS	DESCRIPTION
----------------	-------------


Rails	1 1/4 (32 mm) low-density wood
Stiles	1 1/4 (32 mm) low-density wood
Core	Solid particle board density 28-32 lbs (per cubic foot)
Face	4 mm HDF (850 kg/cbm) as selected
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
Shelf (optional)	1 1/4 (32 mm) x 6 (152 mm) low-density wood or matching veneer
Warranty	1 year against warping
Optional	WH compliant 20 minute fire-rated door with intumescent strip (swells under intense heat) and matching hardwood shelf

*Dimensions are nominal before trimming

Face



Unie

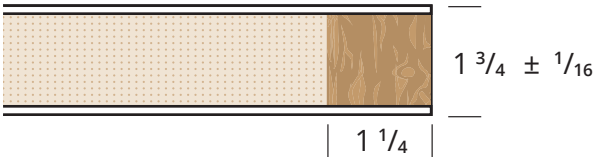

Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.