



Series 3100

V3 134


SPECIFICATIONS DESCRIPTION

<b>Rails</b>	1 1/4 (32 mm) low-density wood
<b>Stiles</b>	2 7/8 (48 mm) LSL type including 0,390 (10 mm) wood, preferably matching veneer
<b>Core</b>	Hollow with honeycomb, 1 (25 mm) cells, 11 PSI
<b>Lock Block</b>	On both sides 2 7/8 (73 mm) x 8 (203 mm) for lock
<b>Face</b>	As selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Warranty</b>	3 years against warping
<b>Optional Warranty</b>	Lifetime against warping


\*Dimensions are nominal before trimming

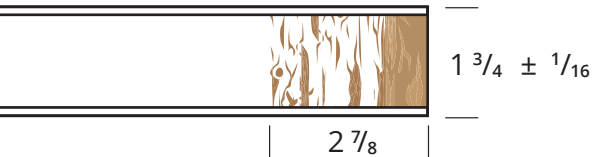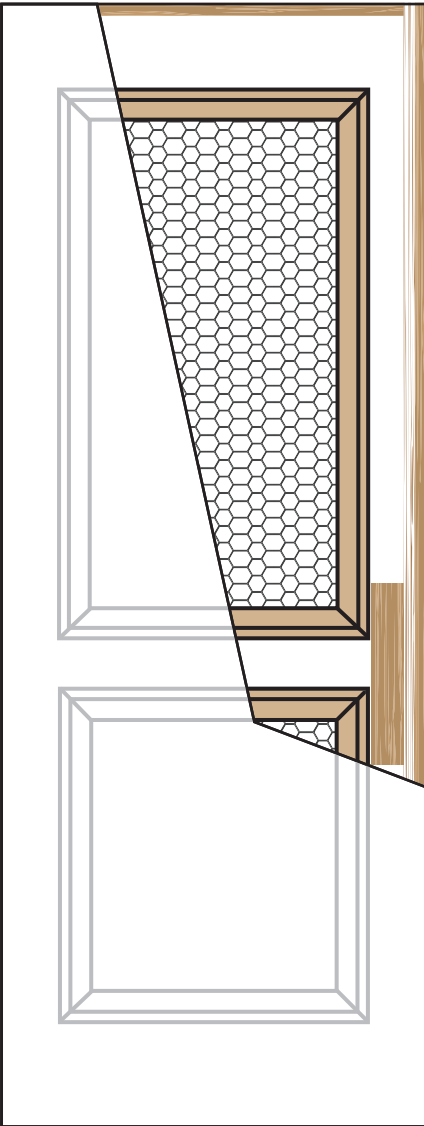


Face




Caiman




Carrara




Cashal




Classique




Clermont




Colonist



Corvado



Conmore



Coventry



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.