


Hollow core folding door

Series 3100

V3 134PL2

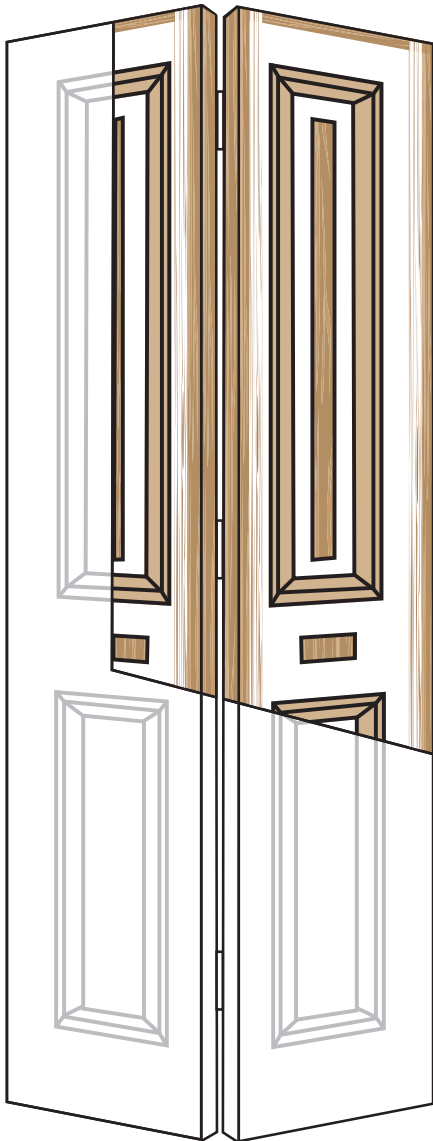


SPECIFICATIONS DESCRIPTION


<b>Rails</b>	1 1/4 (32 mm) low-density wood
<b>Stiles</b>	2 7/8 (48 mm) LSL type including 0,390 (10 mm) wood, preferably matching veneer
<b>Core</b>	Hollow with 1 1/4 (32 mm) low-density wood reinforcement
<b>Lock Block</b>	In centre for escutcheon (knob) 1 1/4 (32 mm) x 5 1/2 (140 mm)
<b>Face</b>	As selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Hinge</b>	<b>Heavy-duty</b> installed
<b>Warranty</b>	3 years against warping

\*Dimensions are nominal before trimming


Face




Caiman




Carrara




Cashal




Classique




Clermont




Colonist




Corvado



Conmore



Coventry

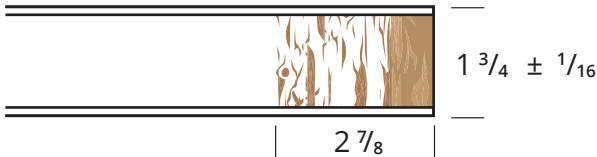

Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.