


**Series 3800**

**P3 834HOL**

**SPECIFICATIONS DESCRIPTION**

<b>Rails</b>	1 1/4 (32 mm) low-density wood
<b>Stiles</b>	2 7/8 (73 mm) LSL type including 0,390 (10 mm) wood, preferably matching veneer
<b>Core</b>	Solid particle board density 28-32 lbs (per cubic foot)
<b>Face</b>	As selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Shelf (optional)</b>	1 1/4 (32 mm) x 6 (152 mm) low-density wood or matching veneer
<b>Optional</b>	WH compliant 20 minute fire-rating
<b>Warranty</b>	3 years against warping

\*Dimensions are nominal before trimming

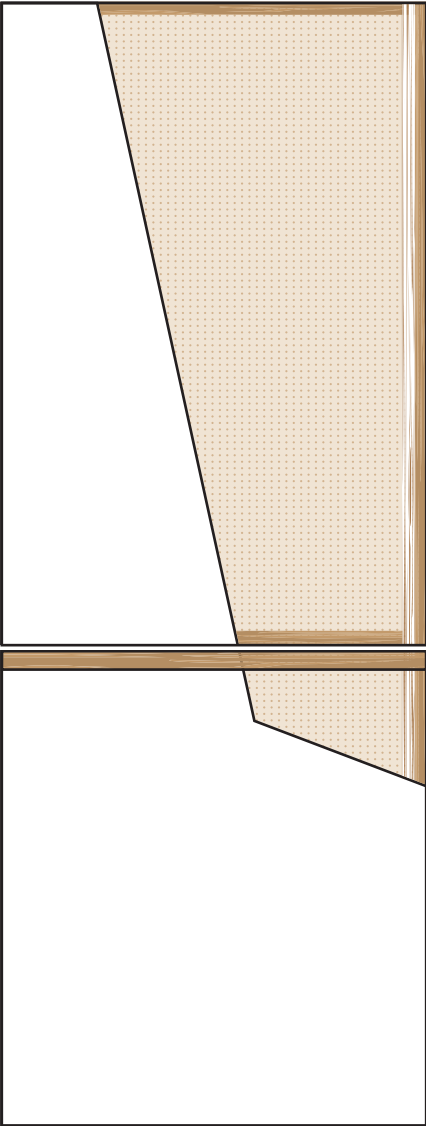

**Face**



Unie



1 3/4 ± 1/16

2 7/8



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.