



**Series 3800**

**V3 834**


**SPECIFICATIONS DESCRIPTION**

<b>Rails</b>	1 1/4 (32 mm) low-density wood
<b>Stiles</b>	2 7/8 (73 mm) LSL type including 0,390 (10 mm) wood, preferably matching veneer
<b>Core</b>	Hollow with honeycomb, 1 (25 mm) cells, 11 PSI
<b>Lock Block</b>	On both sides 3 3/4 (95 mm) x 16 (406 mm) for lock
<b>Face</b>	4 mm HDF (850 kg/cbm) as selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Warranty</b>	3 years against warping
<b>Optional Warranty</b>	Lifetime against warping

\*Dimensions are nominal before trimming

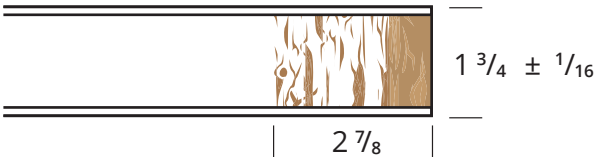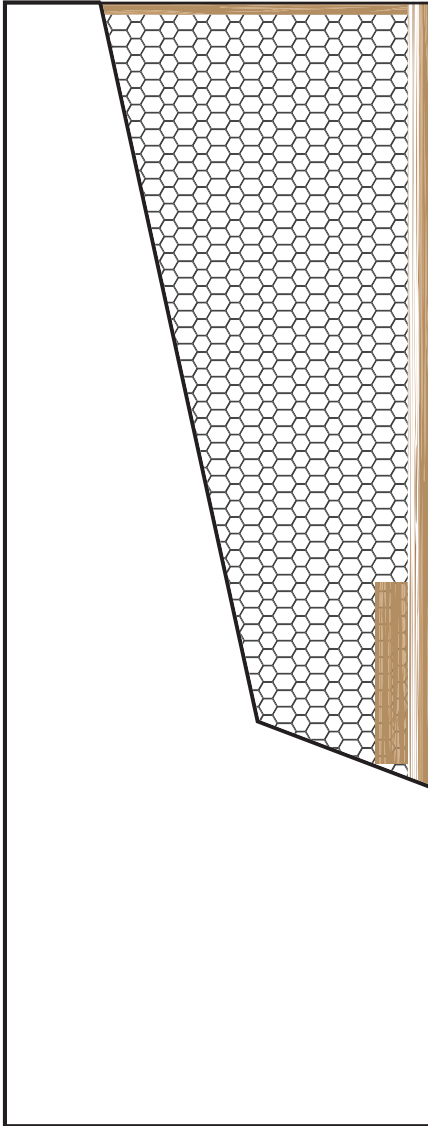

**Designer series (HDF premium)**

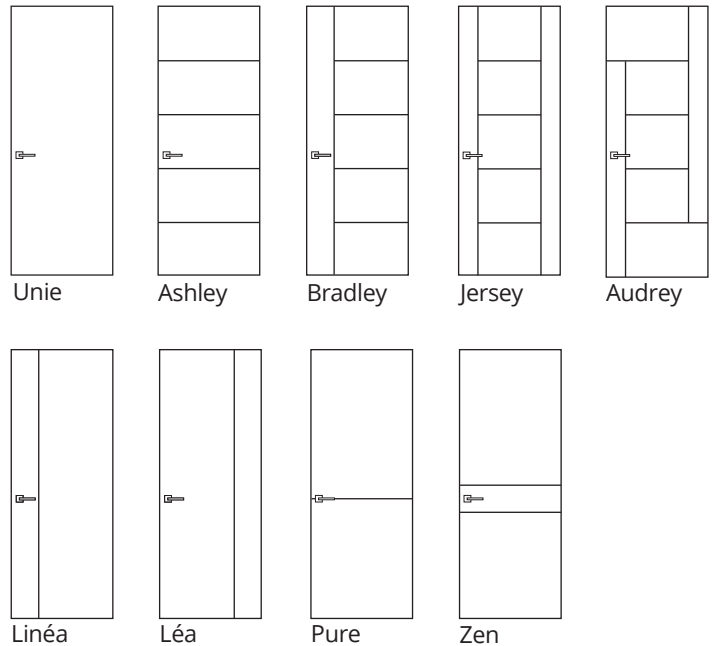

Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.