

Series 3900

P3 934HOL

SPECIFICATIONS DESCRIPTION

<b>Rails</b>	1 1/4 (32 mm) low density wood
<b>Stiles</b>	2 7/8 (73 mm) LSL type including 0,390 (10 mm) wood, preferably matching veneer
<b>Champ</b>	Covered with 1/16 (0,06 mm) hot-set matching veneer
<b>Core</b>	Solid particle board density 28-32 lbs (per cubic foot)
<b>Face</b>	4 mm HDF with selected veneer, density 850-900 kg/m <sup>3</sup>
<b>Glue</b>	type II, water-resistant, norme ASTM E2074 standard formaldehyde free
<b>Shelf (optional)</b>	1 1/4 (32 mm) x 6 (152 mm) low density wood or matching veneer
<b>Warranty</b>	1 year against warping
<b>Optional</b>	WH compliant 20 minute fire-rated door with intumescent strip (swells under intense heat) and matching hardwood shelf

\*Dimensions are nominal before trimming


Face



Rosewood




Bianco



Wengé



Rovere city

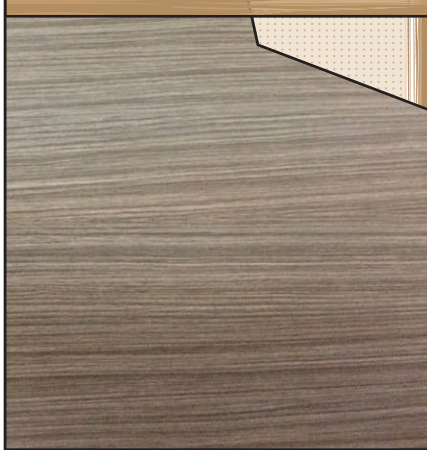

1 3/4 ± 1/16

2 7/8

↑  
1/16



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.