

## Hollow core folding door

### Series 4100


### V4 138PL2




SPECIFICATIONS	DESCRIPTION
<b>Rails</b>	3 1/4 (83 mm) LSL type
<b>Stiles</b>	4 3/8 (111 mm) LSL type including 7/8 (22 mm) wood, preferably matching veneer
<b>Core</b>	Hollow with 1 1/8 (29 mm) low-density wood reinforcement
<b>Lock Block</b>	In centre for escutcheon (knob) 1 1/4 (32 mm) x 5 1/2 (140 mm)
<b>Face</b>	As selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Hinge</b>	<b>Heavy-duty</b> installed
<b>Warranty</b>	Lifetime against warping

\*Dimensions are nominal before trimming


#### Face




Caiman




Carrara




Cashal




Classique




Clermont




Colonist




Corvado



Conmore



Coventry

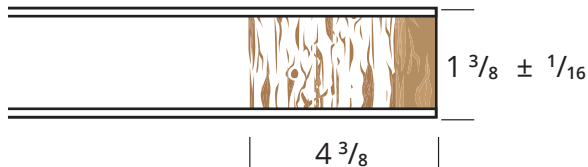

Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.