


Series 4800

P4 838HOL

**SPECIFICATIONS DESCRIPTION**

<b>Rails</b>	3 1/4 (83 mm) LSL type
<b>Stiles</b>	4 3/8 (111 mm) LSL type including 7/8 (22 mm) wood, preferably matching veneer
<b>Core</b>	Solid particle board density 28-32 lbs (per cubic foot)
<b>Face</b>	As selected
<b>Glue</b>	type II, water-resistant, ASTM E2074 standard formaldehyde free
<b>Shelf (optional)</b>	1 1/4 (32 mm) x 6 (152 mm) low-density wood or matching veneer
<b>Optional</b>	WH compliant 20 minute fire-rating
<b>Warranty</b>	Lifetime against warping

\*Dimensions are nominal before trimming

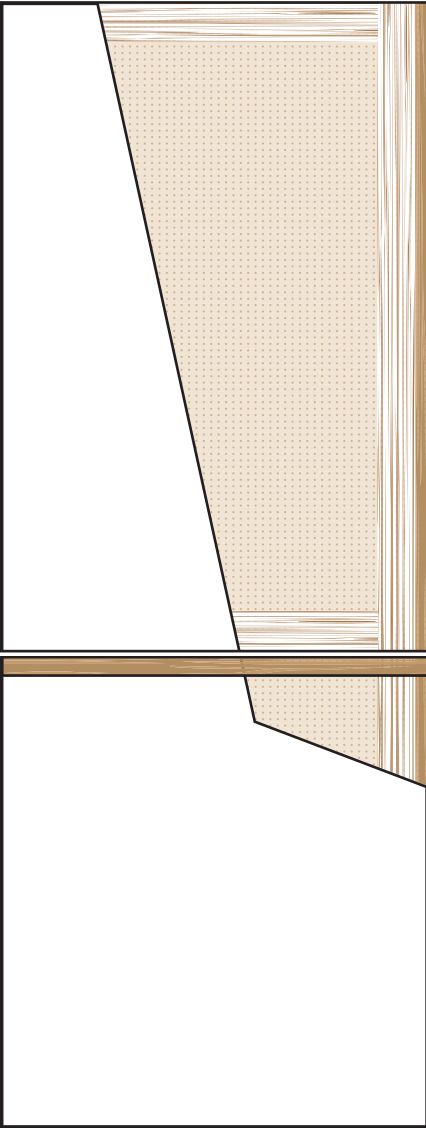

**Face**



Unie



1 3/8 ± 1/16

4 3/8



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.