


Serie 5100


F5 134

SPECIFICATIONS	DESCRIPTION
Rails	1" (25 mm) compliant HDF
Stiles	1" (25 mm) compliant HDF
Core	Nonfuel mineral
Face	As selected
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
45	WH compliant 45 minute fire-rated door for embossed doors
Warranty	Lifetime against warping


*Dimensions are nominal before trimming

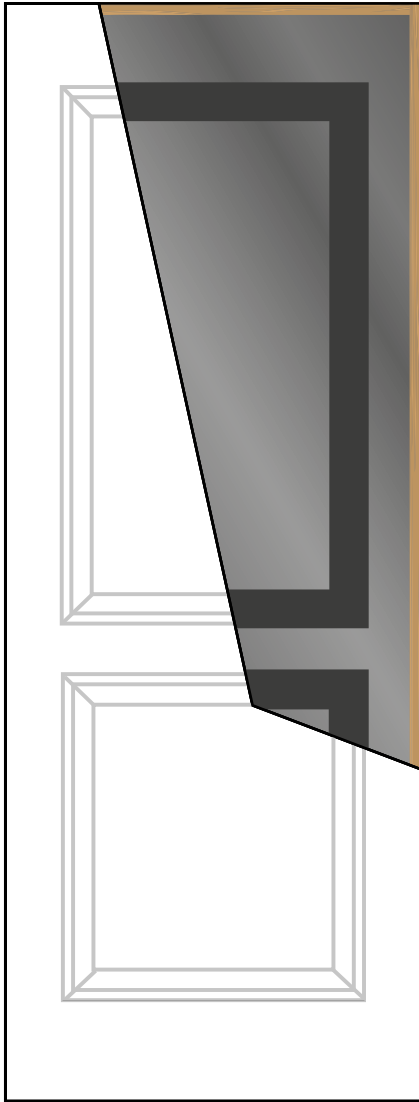


Face




Caiman




Carrara




Cashed




Classique




Clermont




Colonist



Corvado



Conmore



Coventry

1 3/4 ± 1/16

1



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.

Serie 5700

F5 734



SPECIFICATIONS	DESCRIPTION
Rails	1" (25 mm) compliant HDF
Stiles	1" (25 mm) compliant HDF
Core	Heavy duty Agrifibre
Veneer	As selected
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
45	WH compliant 45 minute fire-rating
60	WH compliant 60 minute fire-rating
90	WH compliant 90 minute fire-rating
Warranty	Lifetime against warping

*Dimensions are nominal before trimming

Veneer



Lauan



Birch



Oak

Other species available



1 3/4 ± 1/16

1




Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.

Serie 5800



F5 834

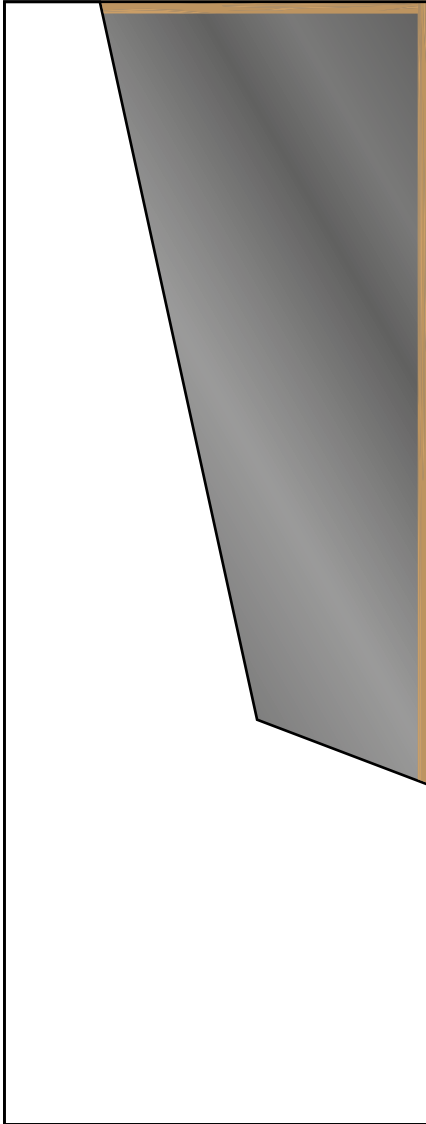

SPECIFICATIONS	DESCRIPTION
Rails	1" (25 mm) compliant HDF
Stiles	1" (25 mm) compliant HDF
Core	Heavy duty Agrifibre
Face	4 mm HDF (850 kg/cbm) as selected
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
45	WH compliant 45 minute fire-rating
60	WH compliant 60 minute fire-rating
90	WH compliant 90 minute fire-rating
Warranty	Lifetime against warping

*Dimensions are nominal before trimming

Designer series (HDF premium)

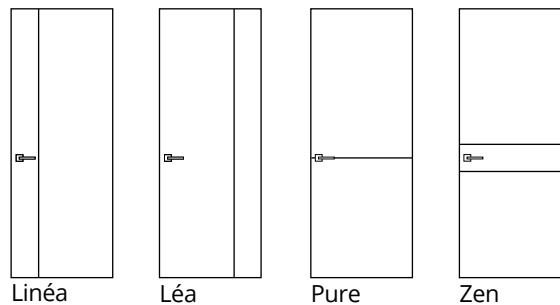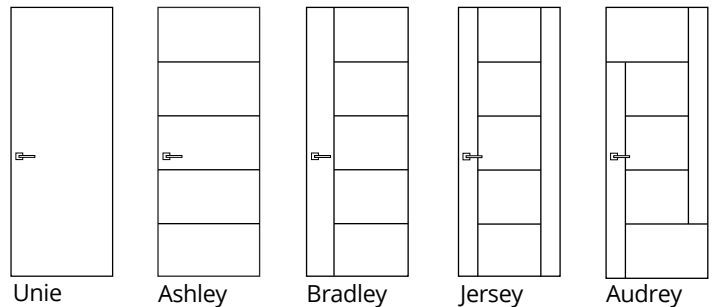

Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.

Series 5900

F5 934



SPECIFICATIONS	DESCRIPTION
Rails	1" (25 mm) WH compliant HDF
Stiles	1" (25 mm) WH compliant HDF
Champ	Covered with 1/16 (0,06 mm) hot-set matching veneer
Core	Heavy duty Agrifibre
Face	4 mm HDF with veneer as selected density 850-900 kg/m ³
Glue	type II, water-resistant, ASTM E2074 standard formaldehyde free
45	WH compliant 45 minute fire-rating
60	WH compliant 60 minute fire-rating
90	WH compliant 90 minute fire-rating
Warranty	Lifetime against warping

*Dimensions are nominal before trimming

Face



Rosewood



Bianco



Wengé



Rovere city



1 3/4 ± 1/16

1

1/16



Intertek

All doors manufactured by ID Doors comply with the standards of the Canadian Standards Association. CAN/CSA-0132.2.0.90.